




# COMANSA

## LINDEN 1000


## LC-1060

## 8 t

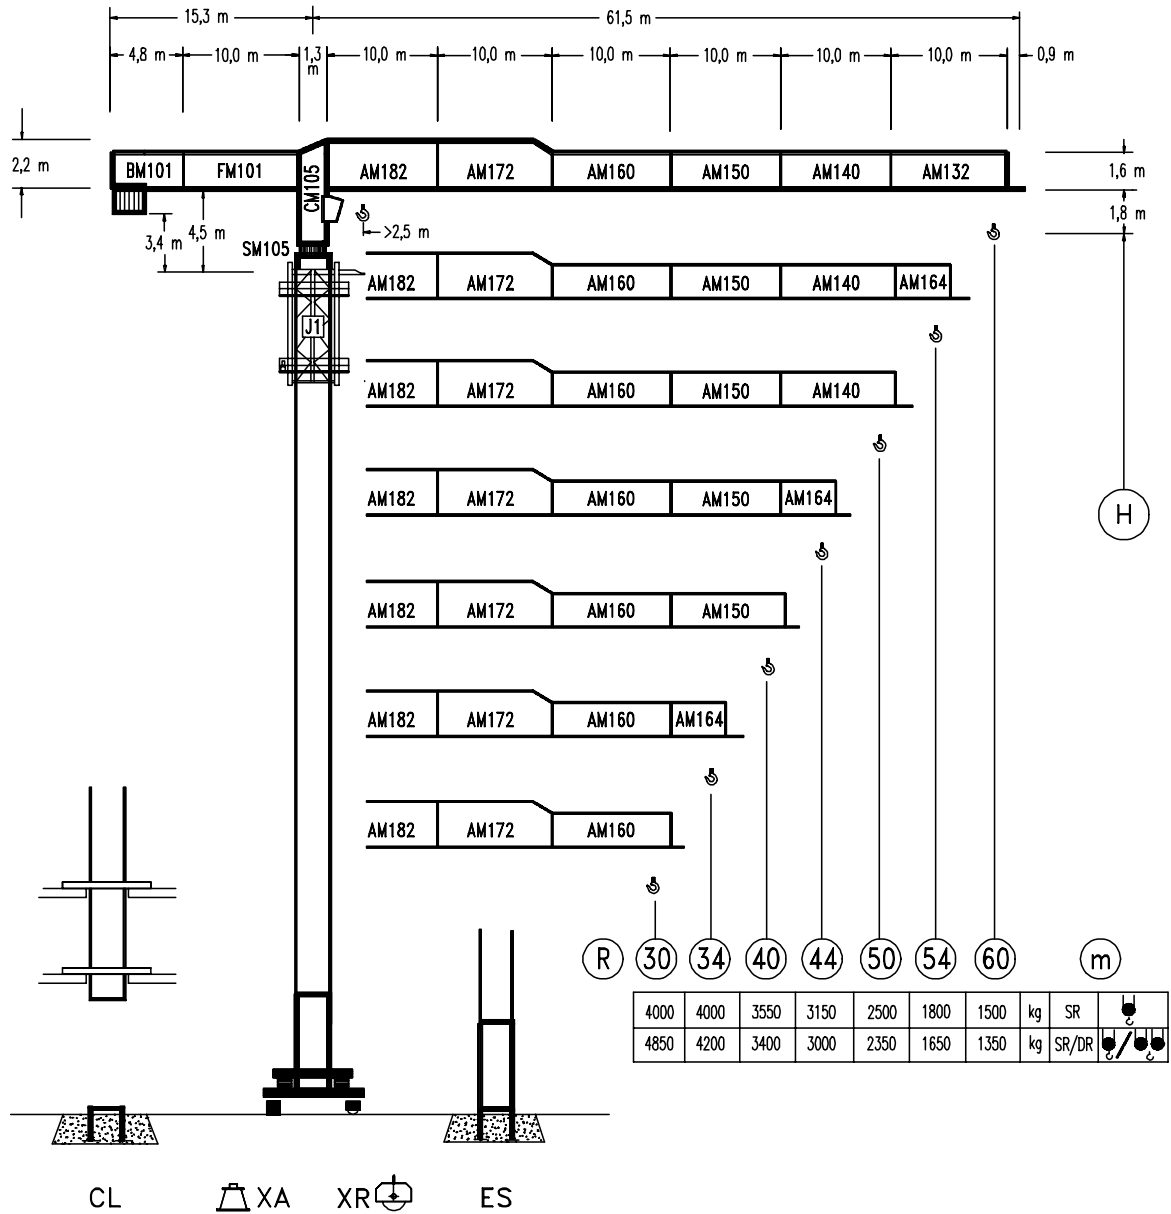

CE  
DIN 15018 H1 B3

R		R <sub>(Cmax)</sub>	C <sub>max</sub>	25	30	34	40	44	50	54	60	m
60	SR	26,4 m	4000	4000	3460	3000	2475	2210	1890	1715	1500	kg
	SR/DR	14,1 m	8000	4145	3340	2865	2340	2070	1745	1570	1350	
54	SR	27,5 m	4000	4000	3615	3130	2590	2310	1980	1800		
	SR/DR	14,6 m	8000	4325	3485	2995	2450	2170	1830	1650		
50	SR	33,3 m	4000	4000	4000	3900	3240	2905	2500			
	SR/DR	17,6 m	8000	5375	4355	3765	3100	2760	2350			
44	SR	35,7 m	4000	4000	4000	4000	3515	3150				
	SR/DR	18,8 m	8000	5805	4715	4080	3365	3000				
40	SR	36,0 m	4000	4000	4000	4000	3550					
	SR/DR	18,9 m	8000	5860	4760	4120	3400					
34	SR	34,0 m	4000	4000	4000	4000						
	SR/DR	19,3 m	8000	5970	4850	4200						
30	SR	30,0 m	4000	4000	4000							
	SR/DR	19,2 m	8000	5970	4850							

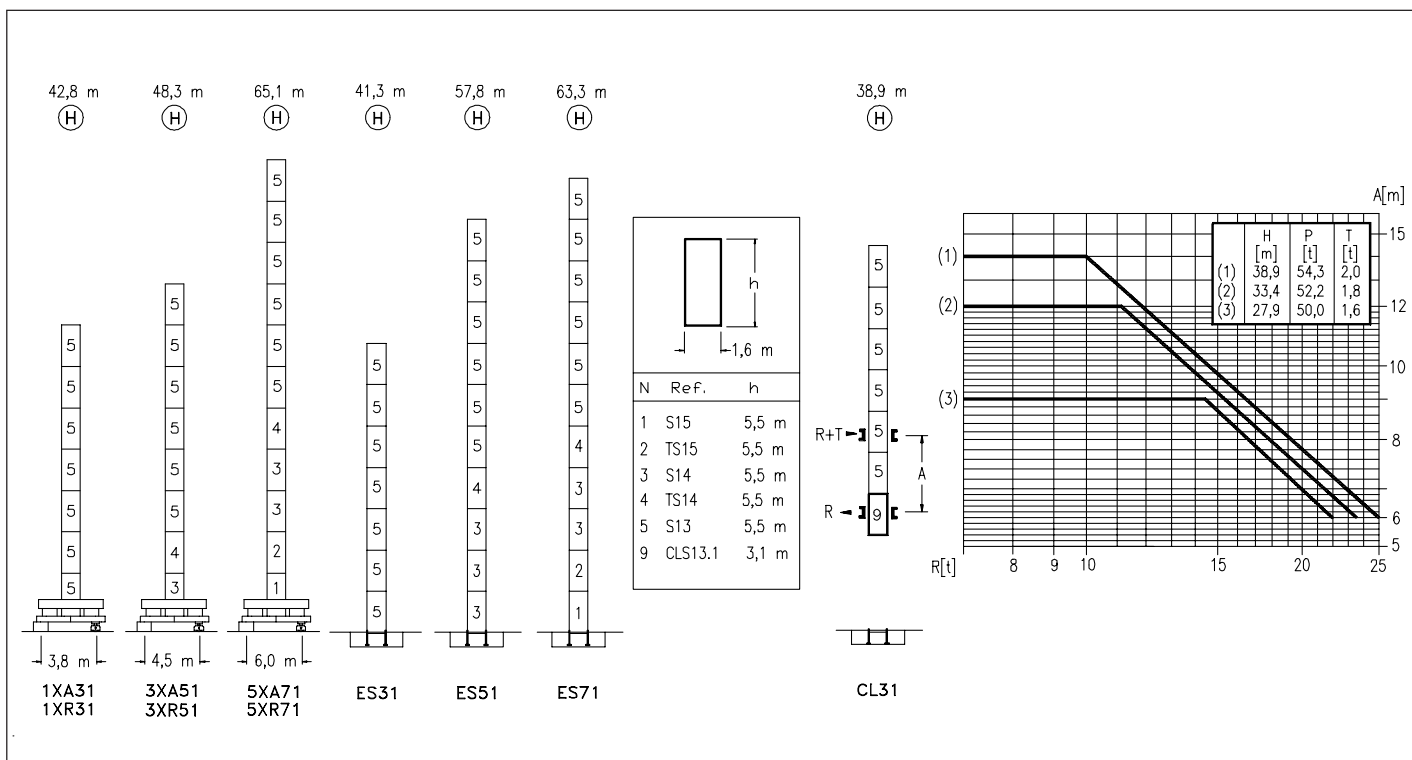

**CS3-3.7**  
3,7 kW

10 m/min  
33 m/min  
66 m/min

**CFU-4.0**  
4 kW

0  $\varnothing$  66 m/min

**GR-7.5**  
2 x 75 Nm

0  $\varnothing$  0,7 rpm

**TS2-5.5** | **TRA-7.5**  
2 x 55 Nm | 2 x 75 Nm

0  $\varnothing$  20 m/min

1XR31 | 3XR51 | 5XR 71

**TRA-7.5VC**  
2 x 75 Nm

0  $\varnothing$  20 m/min

5XR71

**ES3-25-20**  
25 kW

		I	II	III
SR	m/min	7	28	56
	t	4	4	2
DR	m/min	3,5	14	28
	t	8	8	4

**EFU2-24-20**  
24 kW

**EFU2-37-20**  
37 kW

**ES3-33-20**  
33 kW

		I	II	III
SR	m/min	9	36	72
	t	4	4	2
DR	m/min	4,5	18	36
	t	8	8	4

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	<b>400 V</b> <b>3 ph</b> <b>50 Hz</b>
--	---

<b>R. máx.</b> En servicio In operation En service In Betrieb	<b>1XR31</b> ..... 72,7 t <b>3XR51</b> ..... 66,8 t <b>5XR71</b> ..... 80,2 t
---	---

Opcional Optional En option Kaufoption	
---	--

<b>R. máx.</b> Fuera de servicio Out of service Hors service Ausser Betrieb	<b>1XR31</b> ..... 87,1 t <b>3XR51</b> ..... 93,4 t <b>5XR71</b> ..... 125,8 t
---	--



**Construcciones Metálicas COMANSA S. A.**  
Polígono Industrial de Areta  
E-31620 Huarte-Pamplona.- SPAIN  
Tel.: (34) 948 335 020 - Fax: (34) 948 330 810  
e-mail: info@comansa.com